


# adaptalarm™

Let your machine express itself



Smart sound equipment  
CAN Machine connected  
Simple configuration  
- Clever Machine -

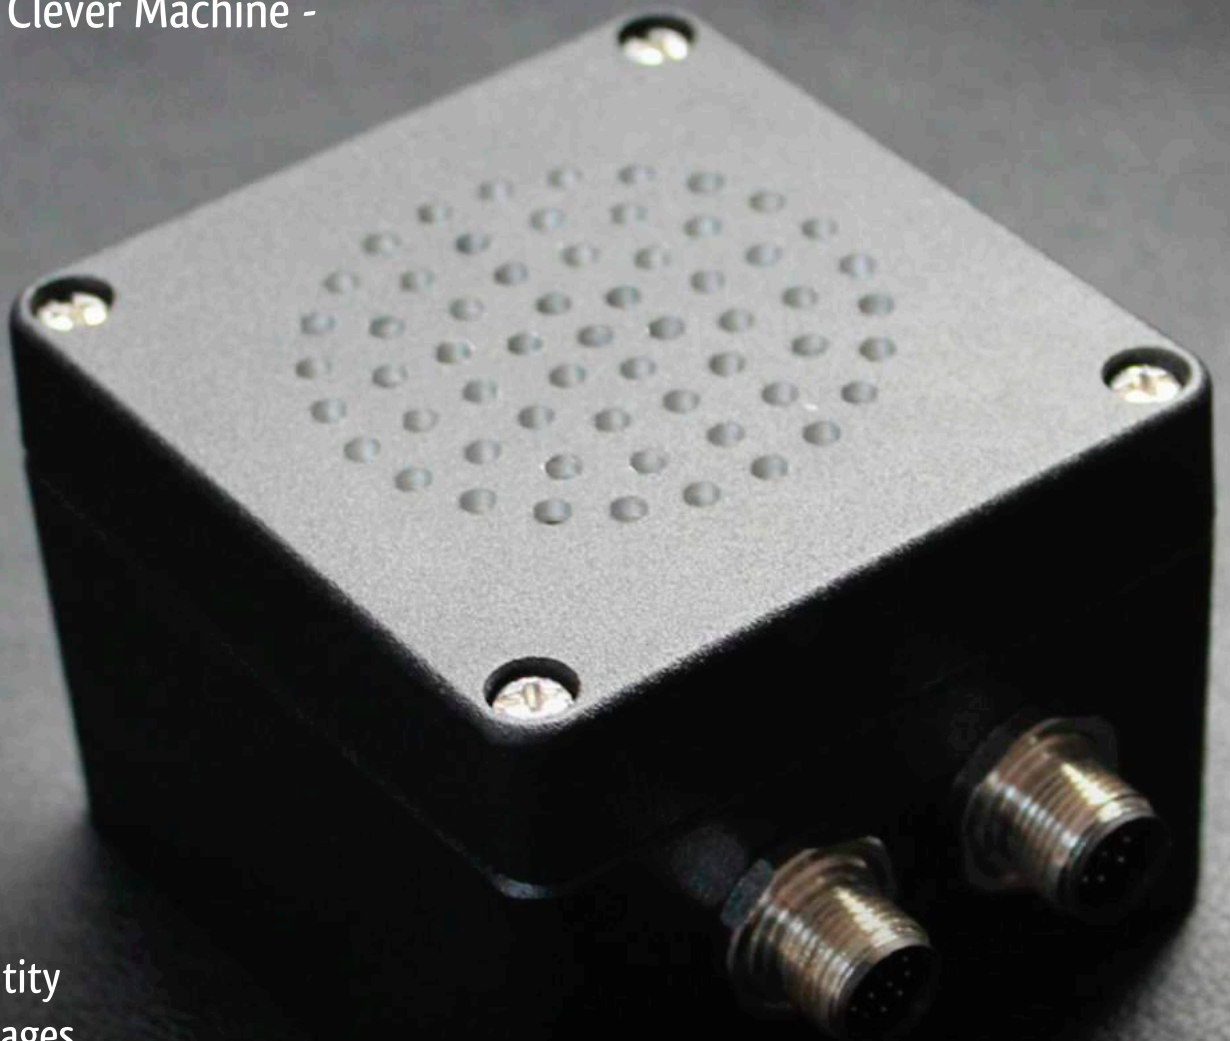

Sound Identity  
Vocal messages  
efa Sound Library  
Operator Advisor  
Preventive Maintenance  
Machine's status  
Multi-languages  
Functions activated  
All in 1

Your creativity will make the difference


# adaptalarm™

Sound equipment



## Mounting plan

Includes 2 mounting screws  
Includes 2 protective caps

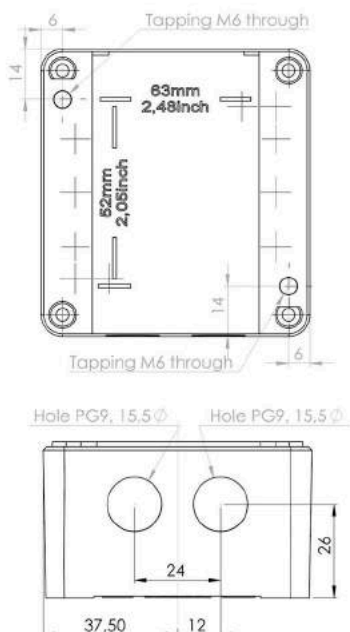

## Technical features

### Functionality

- CAN J1939 Input : 1
- Analog Inputs : 4
- Digital Input / Output : 1 / 1 in option
- USB configuration wire and software available
- Sound priority management : Yes
- Night/Day mode : Yes
- Number of sound allowed : 254\*

### Electrical specification

- Nominal supply voltage : 12V/24V DC
- Working supply voltage : 9V to 32V DC
- Nominal supply current : 105 mA
- Maximum supply current : 500 mA
- Connectors : M12 8 ways for configuration  
M12 12ways for wiring

### Environmental resistance

- Working temperature : -40°C to 80°C
- Protection rating : IP67
- Impact resistance : IK08

### Sound specification

- Speaker frequency response : 250 Hz to 16000 Hz
- Maximum volume\* : 95 dB max

### Mecanical specification

- Dimensions (connectors included) : 93x75x57,5 mm
- Weight : 500g
- Box material : Aluminium

\*depending on sound configuration and sound itself

**efa Industries France**

Tél : +33 247 6178 50 // Fax : +33 247 6178 51  
e-mail : efa@efa-france.com // Web : www.efa-controls.com



**efa Industries Germany**

Tél : +49 30 3011187 0 // Fax : +49 30 3011187 77  
e-mail : efa@efa-berlin.com // Web : www.efa-industries.com