efa Industrial Parts & Equipment

3Dtection Kit

Your machine keeps an eye on the situation

CAN

IP 67 - 69K

-40°C to 85°C

- Reflective jacket detection
- Movement reading
- Ringing and visual alerts
- Zoning adjustments
- Alert setup
- Crash prevention
- Anti-intrusion

efa Industrial Parts & Equipment

3Dtection Kit

3Dtection Kit & ringing alerts

Different kit elements

efa Protective cover

Adaptive angle to your application

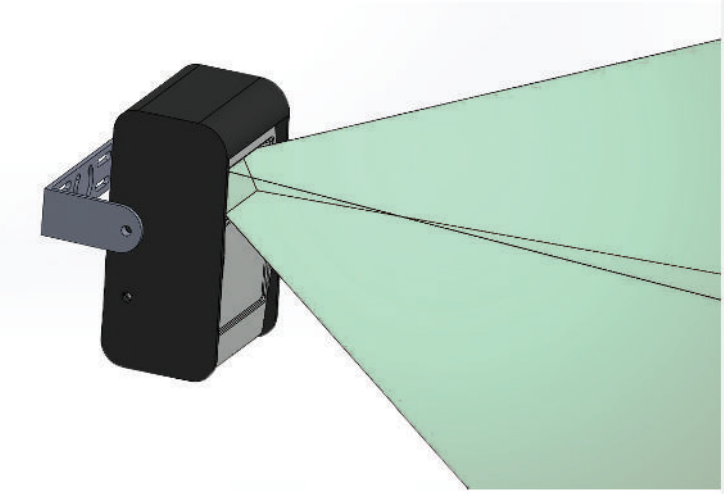

Technical information :

Applications :

- Reflective jacket detection
- Movement reading
- Ringing and visual alerts
- Zoning adjustments
- Alert setup
- Crash prevention
- Anti-intrusion
- 3D sensor software

Electrical characteristics

- Power supply : 9V to 32V DC
- Terminal connection

3D sensor characteristics :

- Opening angles 70x23 /95x32
- Maximum reach 50m
- 3 adjustable zones
- Night mode

Ringing alert characteristics :

- Volume between 0 and 95Db
- - Supported sound quality : wav/ mono /16 bits / 44100Hz

Screening configuration characteristics :

- LED Screen 2,8 inches
- 5 buttons and directional arrow.
- - Setting interface

efa Industries France
Tél : +33 247 6178 50 // Fax : +33 247 6178 51
e-mail : efa@efa-france.com // Web : www.efa-controls.com

efa Industries Germany
Tél : +49 30 3011187 0 // Fax : +49 30 3011187 77
e-mail : efa@efa-berlin.com // Web : www.efa-industries.com